

Smart Interactive Terminal

# SUNMI FT2

Flexible and versatile, designed for seamless interactions.

Powered by  
**SUNMI OS**

Compatible with  
**SUNMI DMP**

## Compact, yet Versatile

A barcode reader, a card reader, and a facial recognition module are all integrated into this 14mm slim profile terminal that comes with a 10" high-resolution display. Less room used, more possibilities to embrace.

## Built for High Performance

Equipped with an octa-core high performance processor and 2G RAM+32G ROM memory, FT2 delivers smooth operations and supports barcode reading, etc. Wi-Fi, wired and 4G connectivity are also supported.

## Durable and Resistant

Industrial touch screen that supports wet-hand and glove touch.

\*IP54: water-, dust-, bug- and fire-proof to stand real world challenges and save your maintenance costs.

\*Data comes from SUNMI Lab.

## Install the Way You Need

Install FT2 with an easy to install and remove wall mount/desktop stand/desktop multi-angle support to fit your business.



## Accessories Multiple Installation Options

### Wall Mount

75\*75 VESA installation



### Desktop Stand


\*Optional.



### Multi-angle Desktop Support

\*Optional.



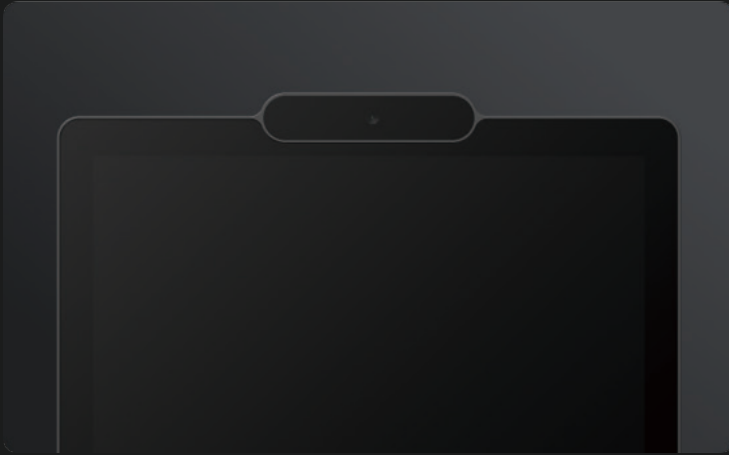

## SUNMI FT2 Tech Specs

### Single-lens version

<b>Model</b> T6712	<b>OS</b> SUNMI OS (base on Android 8.1)	<b>CPU</b> Octa-core 1.8G CPU	<b>Memory</b> 2GB RAM+32GB ROM	<b>Display</b> 10' 800*1280
<b>Bluetooth</b> Bluetooth 2.1/3.0/4.2 BLE	<b>Scanner</b> 1D/2D barcodes	<b>SIM Card Slot</b> 1*SIM	<b>Speaker</b> 2* 2W	<b>Camera</b> Single-lens WDR camera, 2MP
<b>Power Adapter</b> DC: 12V/2A	<b>Network</b> 3G & 4G	<b>Wi-Fi</b> 2.4GHz & 5GHz IEEE 802.11 a/b/g/n/ac	<b>Indicator Light</b> RGB Led	<b>Buttons</b> 1*Power button (lock screen) 1*Volume +/- (hidden)
<b>Card Reader</b> Supports TypeA&B card, Mifare card, Felica card. Compliant with ISO/IEC14443 and ISO15693 standards.	<b>Ports</b> SIM card slot x 1 USB Type A port x 2 RJ45 x 1 2.5 mm DC x 1 RS232 x 1	<b>Accessories</b> Wall mount Desktop support (optional) Desktop stand (optional)	<b>Dimensions (L*W*H)</b> 246.88*229.3*38.01 mm	<b>Weight</b> 930g (stand/support excl.)
<b>Protections</b> IP54/V0 flame-retardant/bug- proof *Date from SUNMI lab	<b>Environment</b> Operating temp.: -10°C~50°C Storage temp.: -20°C~70°C			